
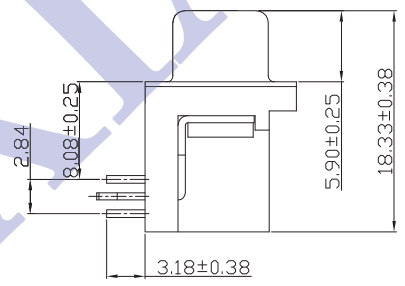


MATERIALS:
 1. Housing: Thermoplastic (UL 94V-0)
 2. Contacts: Brass, Gold Plated on Contact Area
 Sn Plated on Solderails
 Nickel Under Plated Over All
 3. Shell: SPCC, Nickel Plated
 4. Rivet: Copper Alloy, Nickel Plated
 5. Board Lock: SPCC, Sn Plated


SPECIFICATION:
 1. Contact Current Rating: 3A
 2. Dielectric Withstanding Voltage: AC 500V r.m.s.
 3. Insulation Resistance: 5000mΩ Min. at DC 500V
 4. Contact Resistance: 30mΩ Max.
 5. Operating Temperature: -55°C to 105°C

ORDER INFORMATION:
 D 1 1 X X - 09 F - 1 X 0 R
 ① ② ③


- ① 1=W / O(Without Screw)
 2=W / S(Lock Screw)
 3= W / O(Annex Screw)
- ② 0=(Without Screw)
 1=(4.8mm / 11.80mm) SPCC Screw
 2=(5.8mm / 13.00mm) SPCC Screw
 A=(4.8mm / 11.80mm) Copper Alloy Screw
 B=(5.8mm / 13.00mm) Copper Alloy Screw
- ③ 1=Black / PBT
 2=PC99 / PBT

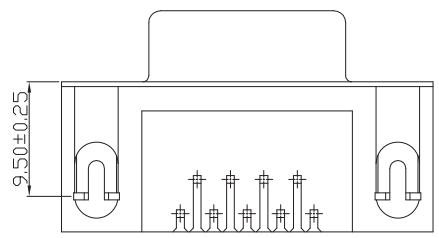


D1110 (鉚合無螺絲)

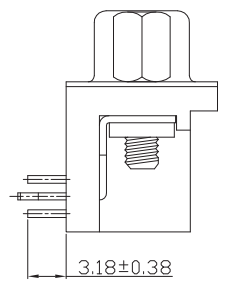

D112X (鉚合鎖螺絲)

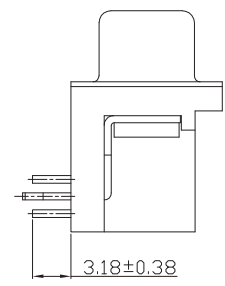

D113X (鉚合附螺絲)

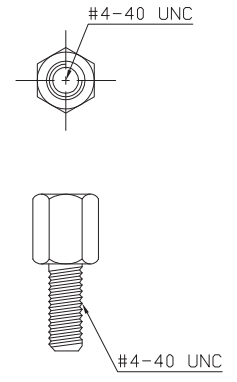

XIAN YI PRECISION CO., LTD.
 祥益精密股份有限公司

TITLE / 品名: D-Sub 9F(8.08mm) Right Angle(R/A) Dip Type Connector

PART NO / 料號: D11XX-09F-1X0R

核準發行章
僅供參考

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位		GENERAL TOLERANCE X ±0.50 .X ±0.38 .XX ±0.20 .XXX ±0.10	A.0	圖面發行	2011/05/09
James	James	Cherong	L-001	mm			SHEET 1 OF 1	NO.	REV / 版本

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1