
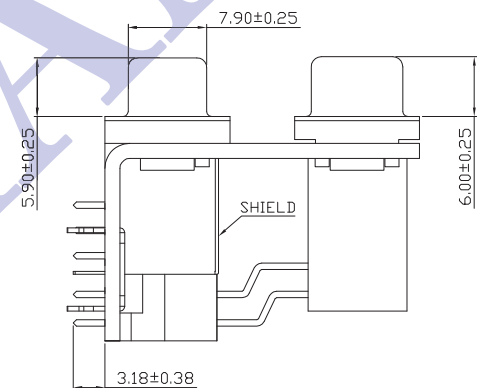


P.C.B. LAYOUT

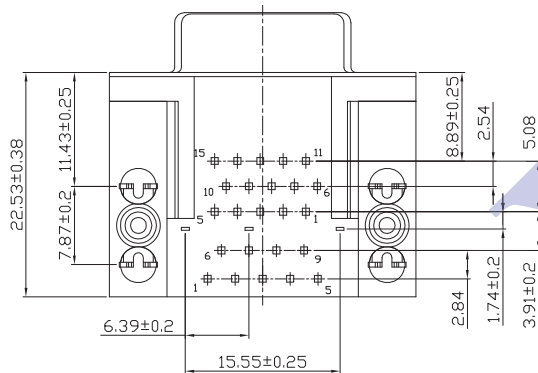

MATERIALS:

1. Housing: Thermoplastic (UL 94V-0)
2. Contacts: Brass, Gold Plated on Contact Area  
Sn Plated on Solderails  
Nickel Under Plated Over All
3. Shell: SPCC, Nickel Plated
4. Rivet: Copper Alloy, Nickel Plated
5. Board Lock: Brass, Sn Plated
6. Bracket: SPCC, Nickel Plated
7. Shield: SPCC, Nickel Plated

SPECIFICATION:

1. Contact Current Rating: 3A
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000mΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

ORDER INFORMATION:

D A B X 2 X - 1 M 2 F - 1 1 X 0 R

- ① ② ③

- ① 1=W / O(Without Screw)  
2=W / S(Lock Screw)  
3= W / O(Annex Screw)

- ② 0=(Without Screw)  
1=(4.8mm / 11.80mm) SPCC Screw  
2=(5.8mm / 13.00mm) SPCC Screw  
A=(4.8mm / 11.80mm) Copper Alloy Screw  
B=(5.8mm / 13.00mm) Copper Alloy Screw

- ③ 1=Black / PBT  
2=Black / PBT+High Temperature  
5=PC99 / PBT  
6=PC99 / PBT+High Temperature

**XIAN YI PRECISION CO., LTD.**  
祥益精密股份有限公司

TITLE / 品名: D-Sub 9M+VGA(19.05mm) Right Angle(R/A) Dual Port Dip Type Connector

PART NO / 料號: DABX2X-1M2F-11X0R

核準發行章  
**僅供參考**

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	 	GENERAL TOLERANCE X ±0.50 .X ±0.38 .XX ±0.20 .XXX ±0.10	A.0	圖面發行	2011/05/09	
James	James	Chenrong	L-021	mm	SHEET 1 OF 1		NO.	REV / 版本	修訂內容	日期