

RECOMMENDED PCB LAYOUT

MATERIALS:

1. Housing: Thermoplastic (UL 94V-0)
2. Contacts: Brass, Gold Plated on Contact Area
Sn Plated on Solderails
Nickel Under Plated Over All
3. Shell: SPCC, Nickel Plated
4. Rivet: Copper Alloy, Nickel Plated
5. Board Lock: SPCC, Sn Plated Over Nickel

SPECIFICATION:

1. Contact Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 1000 mΩ Min. at DC 500V
4. Contact Resistance: 30 mΩ Max.
5. Operating Temperature: -20°C to 85°C



ORDER INFORMATION:

D 7 3 X X - 29 F - 1 X 0 R
① ② ③


① 1=W / O(Without Screw)
2=W / S(Lock Screw)
3= W / O(Annex Screw)

② 0=(Without Screw)
1=(4.8mm / 11.80mm) SPCC Screw
2=(5.8mm / 13.00mm) SPCC Screw
A=(4.8mm / 11.80mm) Copper Alloy Screw
B=(5.8mm / 13.00mm) Copper Alloy Screw


③ 1=Ivory / PBT
2=Ivory / PBT+High Temperature
3=Ivory / High Temperature

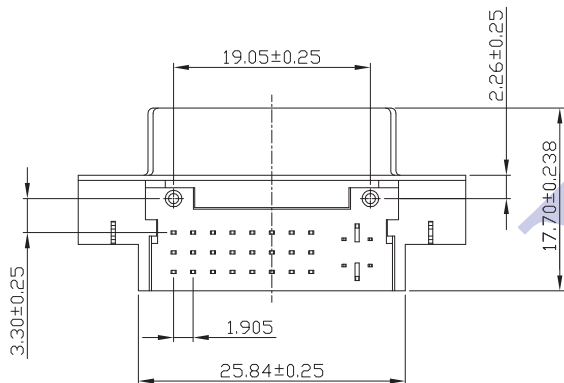

D7310 (鉚合無螺絲)



D732X (鉚合鎖螺絲)

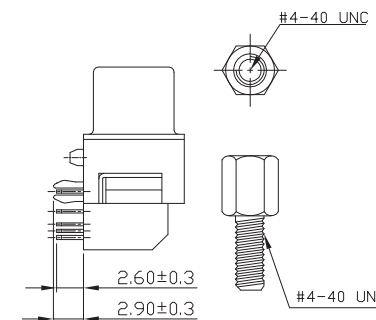

D733X (鉚合附螺絲)

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: DVI 24P+5P(2.26mm) Right Angle(R/A) Dip Connector

PART NO / 料號: D73XX-29F-1X0R

核準發行章
僅供參考

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位		GENERAL TOLERANCE X ±0.50 .X ±0.38 .XX ±0.20 .XXX ±0.10	A.0	圖面發行	2011/05/09	
James	James	Chenrong	L-026	mm		SHEET 1 OF 1	NO.	REV / 版本	修訂內容	日期

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1